


MR2 motor trolley

- ▶ Up to 5,000 kg load capacity
- ▶ 380 - 440 V / 50 Hz
- ▶ Single and dual traveling speed
- ▶ Adjustable start-up and braking ramps (frequency inverter)
- ▶ Connector for rigid suspension (ER2 electric chain hoist)
- ▶ Heat-treated wheels

Options

- ▶ Fall protection device and bumpers as a set

MR2
with ER2

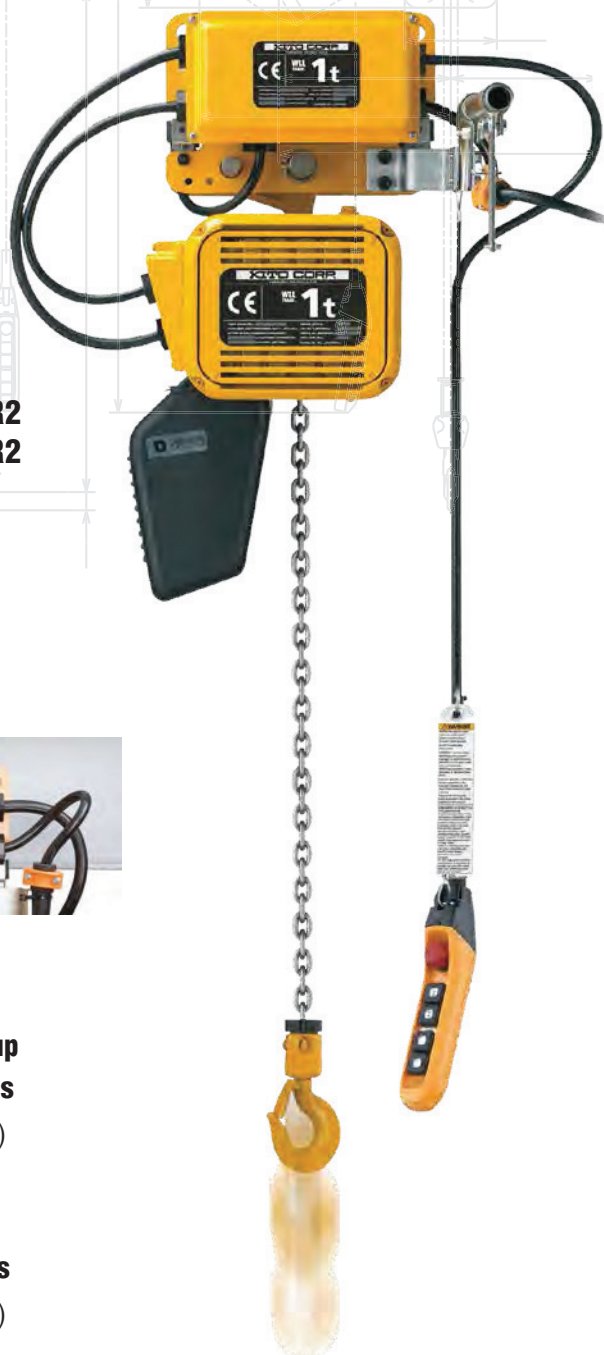


MR2

**Adjustable start-up
and braking ramps**
(frequency inverter)

**Adjustable
traversing speeds**
(frequency inverter)



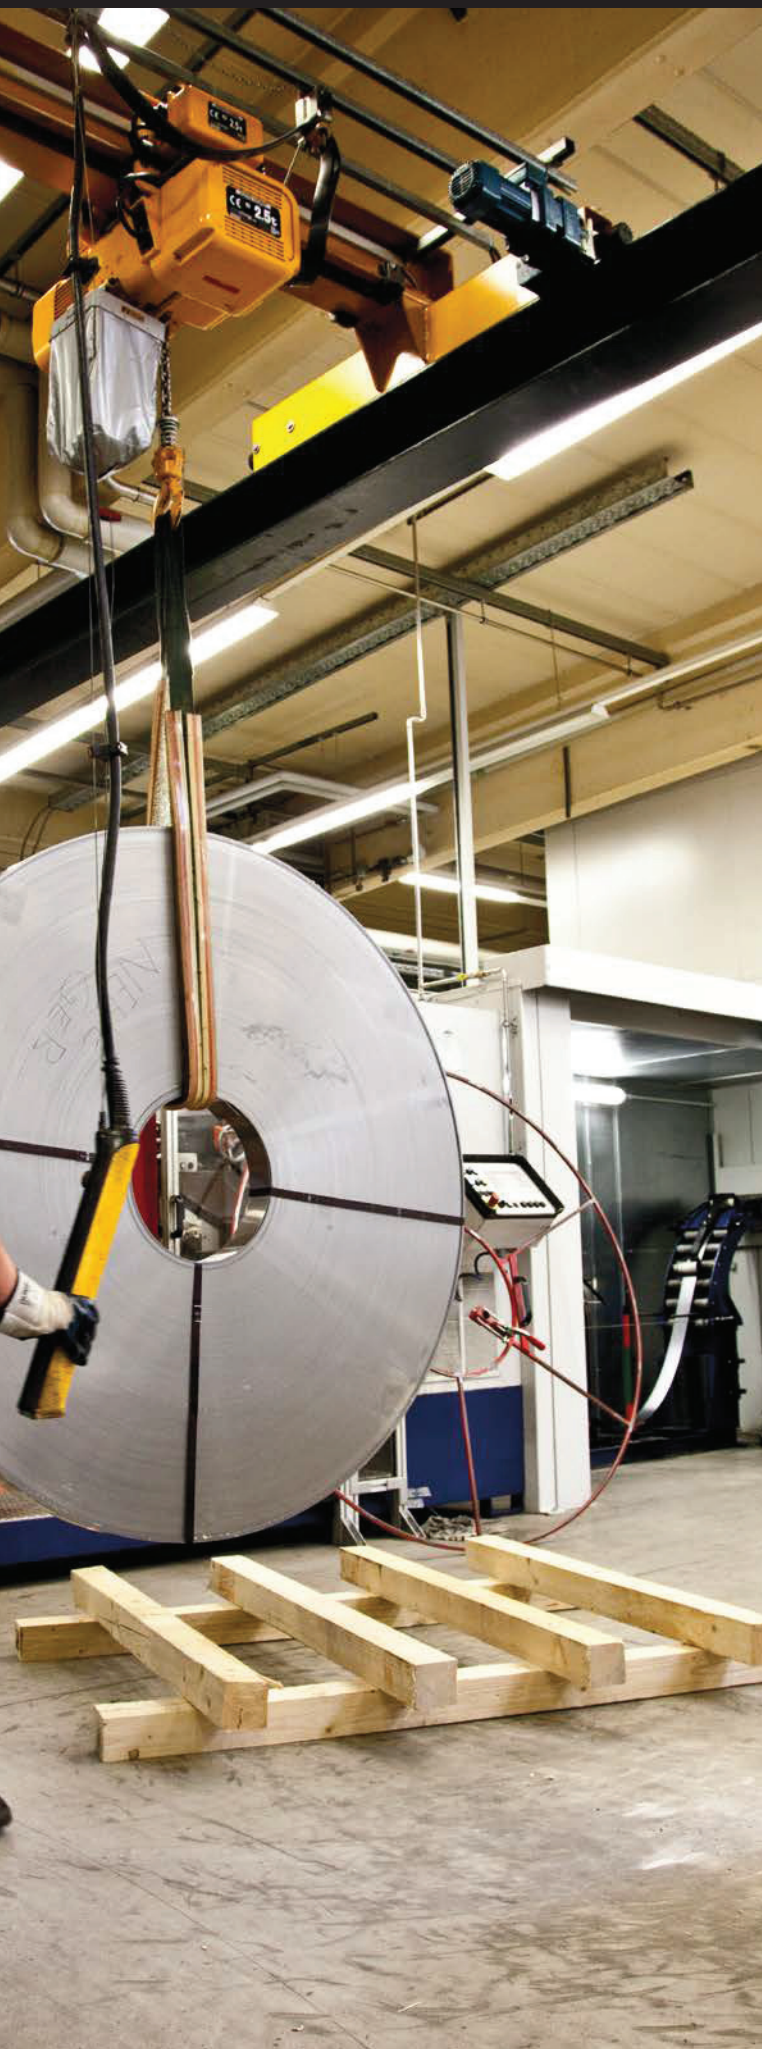

**MR2
with ER2**

Technical data

Type	Load capacity	Version	Speed	Flange width	Travel speed	ED	Curve radius min.
	kg			mm	m/min	%	mm
MR2	125	S	single	58 - 163	20.0	40	800
MR2	125	IS	dual	58 - 163	24.0/4.0-2.4	27 / 13	800
MR2	250	S	single	58 - 163	20.0	40	800
MR2	250	IS	dual	58 - 163	24.0/4.0-2.4	27 / 13	800
MR2	500	S	single	58 - 163	20.0	40	800
MR2	500	IS	dual	58 - 163	24.0/4.0-2.4	27 / 13	800
MR2	1,000	S	single	58 - 163	20.0	40	800
MR2	1,000	IS	dual	58 - 163	24.0/4.0-2.4	27 / 13	800
MR2	1,600	S	single	82 - 204	20.0	40	800
MR2	1,600	IS	dual	82 - 204	24.0/4.0-2.4	27 / 13	800
MR2	2,000	S	single	82 - 204	20.0	40	800
MR2	2,000	IS	dual	82 - 204	24.0/4.0-2.4	27 / 13	800
MR2	2,500	S	single	82 - 204	20.0	40	1,000
MR2	2,500	IS	dual	82 - 204	24.0/4.0-2.4	27 / 13	1,000
MR2	3,200	S	single	82 - 204	20.0	40	1,000
MR2	3,200	IS	dual	82 - 204	24.0/4.0-2.4	27 / 13	1,000
MR2	5,000	S	single	100 - 204	20.0	40	1,000
MR2	5,000	IS	dual	100 - 204	24.0/4.0-2.4	27 / 13	1,000