

**Extreme short  
headroom**




# SHB short headroom block

- ▶ Up to 10,000 kg load capacity
- ▶ Hand chain block integrated into trolley
- ▶ Extensive range of flange widths
- ▶ Shock-resistant gear casing
- ▶ High-performance mechanical brake
- ▶ Fall protection device and rubber bumpers
- ▶ Nickel-plated load chain grade T, series V (G100) in accordance with standard EN 818-7

## Options

- ▶ Overload limiter (OLL)

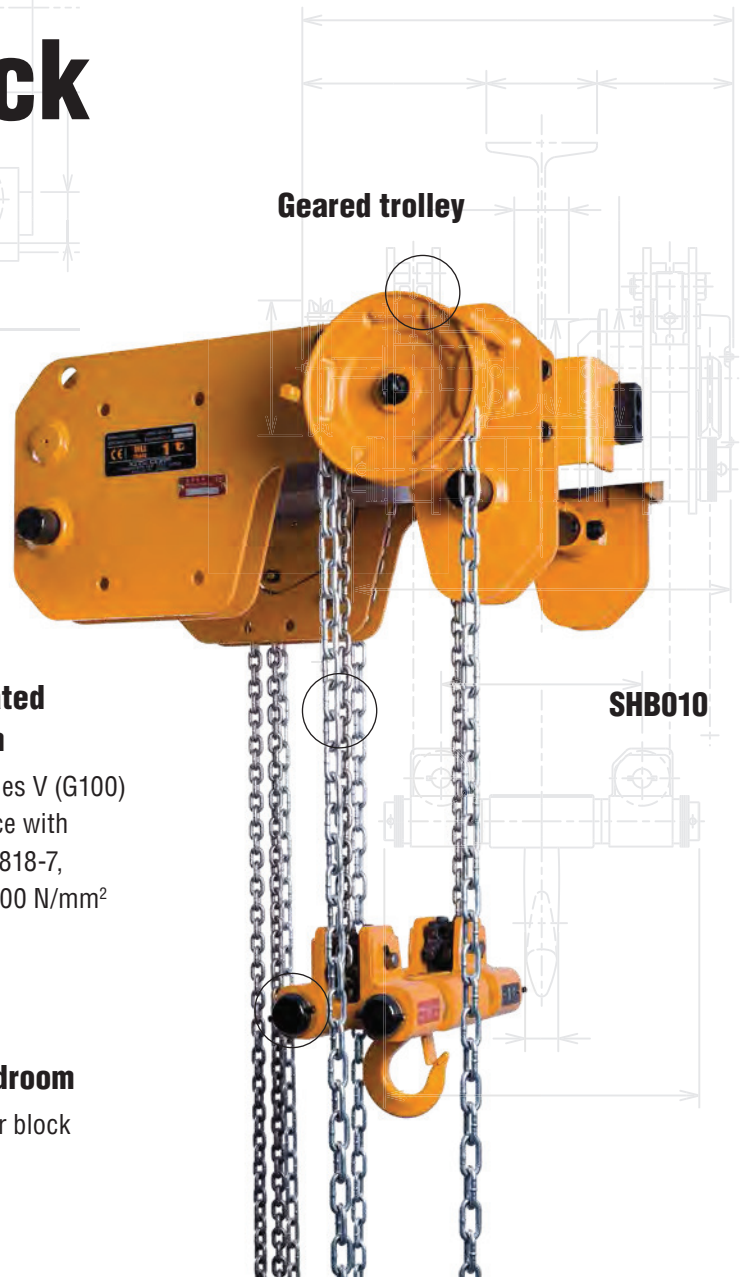

## Nickel-plated load chain

Grade T, series V (G100) in accordance with standard EN818-7, Strength 1,000 N/mm<sup>2</sup>

## Short headroom

Built-in lower block

## Technical data

Type	Load capacity	Standard lifting height	Hand chain length, folded	Hand force, full load, chain block	Hand force, full load, trolley	Flange width in mm		Load chain diameter	Chain falls	Weight	Weight for additional 1 m lift	Headroom C
	kg	m	m	daN	daN	Standard	W30	mm		kg	kg	mm
SHB010	1,000	3.0	3.0	31.4	3.2	58-163	164-305	5.0 x 15.1	2	67.0	3.0	115
SHB020	2,000	3.0	3.0	28.4	2.9	82-204	205-305	7.1 x 21.2	2	110.0	4.2	145
SHB030	3,000	3.0	3.0	36.3	3.7	82-204	205-305	8.0 x 24.2	2	160.0	4.6	165
SHB050	5,000	3.0	3.5	44.1	4.5	125-204	205-305	9.0 x 27.2	2	280.0	5.4	195
SHB075	7,500	3.5	4.0	45	3.6	150-220	221-305	9.0 x 27.2	4	366.0	10.8	255
SHB100	10,000	3.5	4.0	47	4.8	150-220	221-305	9.0 x 27.2	4	366.0	10.8	255