



TSP
with connector C
for hand chain block



TSP plain trolley
125 kg to 2,000 kg




TSP plain trolley
3,000 kg to 5,000 kg

TSP plain trolley

- ▶ Up to 5,000 kg load capacity
- ▶ Lightweight and compact design
- ▶ Fall protection device and rubber bumpers
- ▶ Extensive range of flange widths
- ▶ Heat-treated wheels
- ▶ Sealed, maintenance-free bearings
- ▶ Connector C for rigid suspension and / or hook suspension

Options

- ▶ Connector E for ER2 electric chain hoist
- ▶ W30 flange width extender

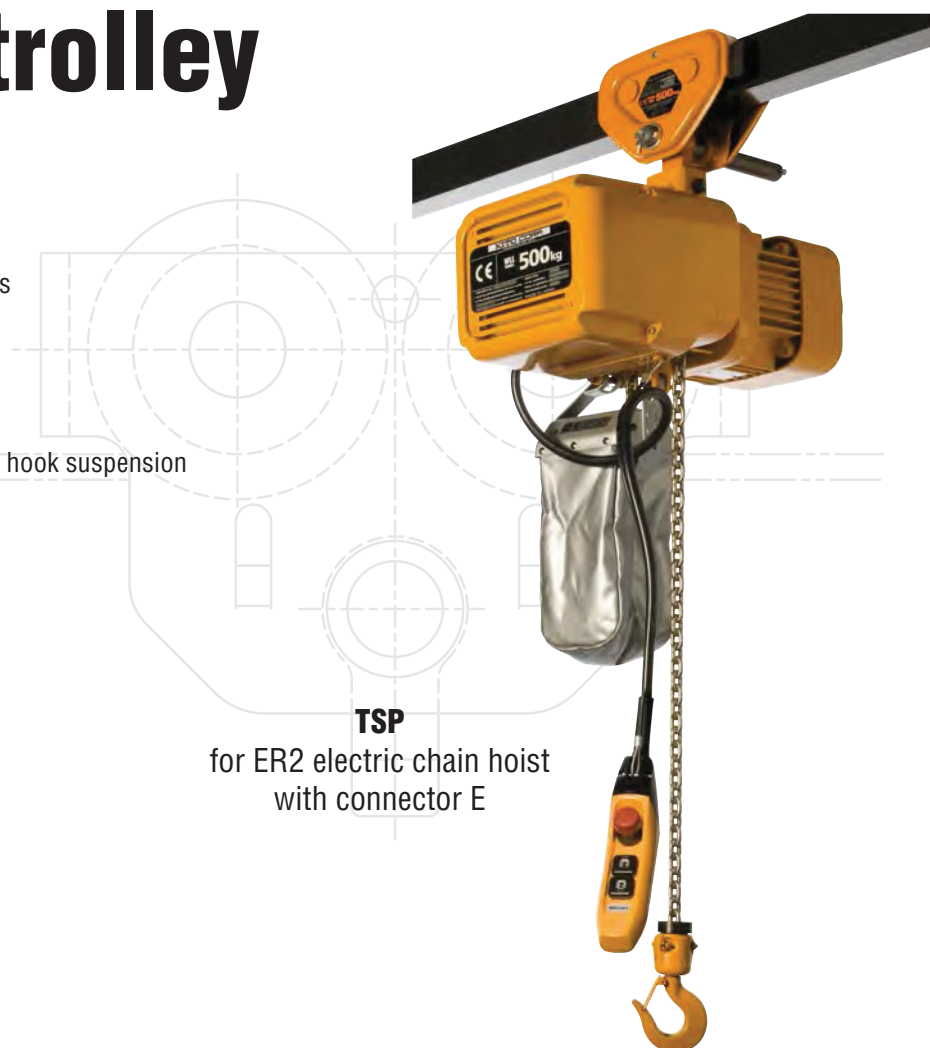

TSP
for ER2 electric chain hoist
with connector E

Technical data

Type	Load capacity	Shaft	Flange width	Connector	Curve radius min.	Weight
	kg		mm		mm	kg
TSP	125	Standard	50 - 163	C	1,150 - 1,200	5.1
TSP	125	W30	164 - 305	C	1,150 - 1,200	5.1
TSP	250	Standard	50 - 163	C	1,150 - 1,200	5.1
TSP	250	W30	164 - 305	C	1,150 - 1,200	5.1
TSP	500	Standard	50 - 163	C	1,150 - 1,200	5.1
TSP	500	W30	164 - 305	C	1,150 - 1,200	5.1
TSP	1,000	Standard	58 - 163	C	1,350 - 1,400	8.0
TSP	1,000	W30	164 - 305	C	1,350 - 1,400	8.0
TSP	1,500	Standard	82 - 204	C	1,600	14.0
TSP	1,500	W30	205 - 305	C	1,600	14.0
TSP	2,000	Standard	82 - 204	C	1,600	14.0
TSP	2,000	W30	205 - 305	C	1,600	14.0
TSP	2,500	Standard	82 - 204	C	1,800	23.0
TSP	2,500	W30	205 - 305	C	1,800	23.0
TSP	3,000	Standard	82 - 204	C	1,800	23.0
TSP	3,000	W30	205 - 305	C	1,800	23.0
TSP	5,000	Standard	100 - 204	C	2,400	50.0
TSP	5,000	W30	205 - 305	C	2,400	50.0