

ELRO ROUND SLING

FOR STANDARD LIFTING

Available from 0.5 to 8 tons, 0.4 to 40 meters

Safety factor 7 :1 – Complying with EN 1492-2 standard

KNOW-HOW : Thanks to our production equipment, we are able to propose custom-designed round slings manufactured with maximum accuracy fulfilling all your needs, and strictly complying with the EN 1492-2 standard.

NOTICE : All our round slings include a single or reinforced sleeve with anti-abrasion treatment, allowing optimal preservation and protection.



Colour	PURPLE	GREEN	YELLOW	GREY	RED	BROWN	BLUE	
WLL (ton)	1	2	3	4	5	6	8	
Ø 1 leg (mm)	15	20	25	30	35	40	45	
Sleeve thickness (mm)	0,75	0,75	0,80	0,80	0,70	0,70	0,70	
Weight/m (g)	270	445	560	760	940	1 170	1 535	
REFERENCE	1 m	ER/1/1	ER/2/1	ER/3/1	ER/4/1	ER/5/1	ER/6/1	ER/8/1
	1,5 m	ER/1/1,5	ER/2/1,5	ER/3/1,5	ER/4/1,5	ER/5/1,5	ER/6/1,5	ER/8/1,5
	2 m	ER/1/2	ER/2/2	ER/3/2	ER/4/2	ER/5/2	ER/6/2	ER/8/2
	2,5 m	ER/1/2,5	ER/2/2,5	ER/3/2,5	ER/4/2,5	ER/5/2,5	ER/6/2,5	ER/8/2,5
	3 m	ER/1/3	ER/2/3	ER/3/3	ER/4/3	ER/5/3	ER/6/3	ER/8/3
	3,5 m	ER/1/3,5	ER/2/3,5	ER/3/3,5	ER/4/3,5	ER/5/3,5	ER/6/3,5	ER/8/3,5
	4 m	ER/1/4	ER/2/4	ER/3/4	ER/4/4	ER/5/4	ER/6/4	ER/8/4
	5 m	ER/1/5	ER/2/5	ER/3/5	ER/4/5	ER/5/5	ER/6/5	ER/8/5
Additional m	ER/1/...	ER/2/...	ER/3/...	ER/4/...	ER/5/...	ER/6/...	ER/8/...	

Manufacturing available up to 100 tons. Please contact us.

PROTECTIVE SLEEVE IN PVC

Colour	PURPLE	GREEN	YELLOW	GREY	RED	BROWN	BLUE
WLL (ton)	1	2	3	4	5	6	8
PVC 1 leg	PVC1/055	PVC1/070	PVC1/080	PVC1/100	PVC1/100	PVC1/110	PVC1/110
PVC 2 legs	PVC2/055	PVC2/070	PVC2/080	PVC2/100	PVC2/100	PVC2/110	PVC2/110

PROTECTIVE SLEEVE IN POLYURETHANE

Colour	PURPLE	GREEN	YELLOW	GREY	RED	BROWN	BLUE
WLL (ton)	1	2	3	4	5	6	8
2 legs 1 side	FP1/50	FP1/75	FP1/90	FP1/120	FP1/120	FP1/150	FP1/180
2 legs 2 sides	FP2/50	FP2/75	FP2/90	FP2/120	FP2/120	FP2/150	FP2/180

• **INFORMATION :** We can adjust the length of your slings evenly. Our certified testing facilities enable to place the slings under constant load conditions or to subject them under test load conditions.



Handy : hook from 1 to 5 tons, specifically designed for easy positioning on the slings.

ROUND SLING CAPACITY RANGING FROM 10 TONS AND ABOVE

Available from 10 to 70 tons, 3 to 40 meters - Safety factor 7 :1 – Complying with EN 1492-2 standard



The 10 tons to 70 tons round sling is made of a sleeve whose weaving confers a high resistance to wearing and abrasion.


Manufacturing
up to
220 tons

Colour	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	
WLL (ton)	10	12	15	20	25	30	40	50	60	
Ø 1 leg (mm)	55	58	60	70	80	90	115	135	145	
Sleeve thickness (mm)	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	1,5	
Weight /m (kg)	2,3	3	3,4	4,3	5	5,7	7,2	9	10,5	
REFERENCE	3 m	ER/10/3	ER/12/3	ER/15/3	ER/20/3	ER/25/3	ER/30/3	ER/40/3	ER/50/3	ER/60/3
	3,5 m	ER/10/3,5	ER/12/3,5	ER/15/3,5	ER/20/3,5	ER/25/3,5	ER/30/3,5	ER/40/3,5	ER/50/3,5	ER/60/3,5
	4 m	ER/10/4	ER/12/4	ER/15/4	ER/20/4	ER/25/4	ER/30/4	ER/40/4	ER/50/5	ER/60/5
	5 m	ER/10/5	ER/12/5	ER/15/5	ER/20/5	ER/25/5	ER/30/5	ER/40/5	ER/50/5	ER/60/5
	Additional m	ER/10/...	ER/12/...	ER/15/...	ER/20/...	ER/25/...	ER/30/...	ER/40/...	ER/50/...	ER/60/...



ROUND SLING FROM 50 TO 100 TONS DOUBLE SLEEVE - SIDE STITCH

Available from 50 to 100 tons, 2 to 40 meters - Safety factor 7 :1 – Complying with EN 1492-2 standard

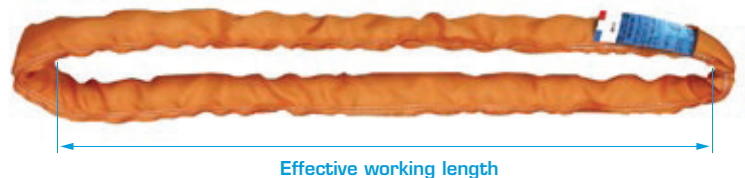

Colour	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	
WLL (ton)	50	60	70	80	90	100	
Ø 1 leg (mm)	135	140	150	160	165	170	
Weight/m (kg)	9	10,5	11,7	14	16	18	
REFERENCE	2 m	ERCC/50/2	ERCC/60/2	ERCC/70/2	ERCC/80/2	ERCC/90/2	ERCC/100/2
	2,5 m	ERCC/50/2,5	ERCC/60/2,5	ERCC/70/2,5	ERCC/80/2,5	ERCC/90/2,5	ERCC/100/2,5
	3 m	ERCC/50/3	ERCC/60/3	ERCC/70/3	ERCC/80/3	ERCC/90/3	ERCC/100/3
	3,5 m	ERCC/50/3,5	ERCC/60/3,5	ERCC/70/3,5	ERCC/80/3,5	ERCC/90/3,5	ERCC/100/3,5
	4 m	ERCC/50/4	ERCC/60/4	ERCC/70/4	ERCC/80/4	ERCC/90/4	ERCC/100/4
	5 m	ERCC/50/5	ERCC/60/5	ERCC/70/5	ERCC/80/5	ERCC/90/5	ERCC/100/5
	Additional m	ERCC/50/...	ERCC/60/...	ERCC/70/...	ERCC/80/...	ERCC/90/...	ERCC/100/...

PROTECTIVE SLEEVE IN PVC

Colour	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE	ORANGE
WLL (ton)	10	12	15	20	25	30	40	50	60	70	80	90	100
PVC 1 leg	PVC1/170	PVC1/170	PVC1/170	PVC1/170	PVC1/170	PVC1/230	PVC1/230	PVC1/230	PVC1/230	PVC1/320	PVC1/320	PVC1/320	PVC1/320
PVC 2 legs	PVC2/170	PVC2/170	PVC2/170	PVC2/230	PVC2/230	PVC2/320	PVC2/320	PVC2/460	PVC2/460	PVC2/460	PVC2/600	PVC2/600	PVC2/600

Leather reinforcement available on request (not displayed).

Double protective sleeve : With capacity over 10 tons, the side stitch makes the sling rounder and more homogeneous.