

FLAT WEBBING SLING (category 2)

B TYPE - DOUBLE PLY - FOLDED EYE

Available from 0.5 to 10 tons, 0.5 to 30 meters and above

Safety factor 7 : 1 – Complying with EN 1492-1 standard




KNOW-HOW : Our production facilities can provide custom-designed slings, manufactured and tested in accordance with EN 1492-1 standards.

The length of your slings can be adjusted evenly. Our certified testing facilities can place the slings under constant load conditions or subject them to test load conditions.

NEW :

Special sling for the lifting of metal cladding sheets.

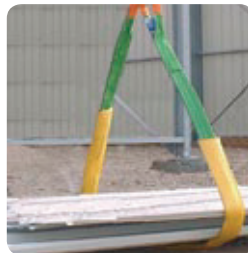

Ref : EASY CLIP

With a simple clip you can annually check any product.

Easy Clip, 1 clic safety !

PRODUCT INFORMATION : Ideal for hook fastening.

Colour	WHITE	PURPLE	OLIVE	GREEN	WHITE	YELLOW	GREY	RED	BROWN	BLUE	ORANGE	
WLL (ton)	0,5	1	1,5	2	2,5	3	4	5	6	8	10	
Width (mm)	25	30	50	60	75	90	120	150	180	240	300	
Thickness (mm)	5,1	6	6,1	6,5	7	7	7	7,5	7,5	8	8	
Weight 1 m (g)	180	280	430	520	650	750	1100	1500	1900	2800	3700	
Weight m/l (g)	150	200	300	400	450	550	800	1000	1200	1700	2250	
REFERENCE	1 m	B25/2/1	B30/2/1	B50/2/1	B60/2/1	B75/2/1	B90/2/1	B120/2/1	B150/2/1	B180/2/1	B240/2/1	B300/2/1
	2 m	B25/2/2	B30/2/2	B50/2/2	B60/2/2	B75/2/2	B90/2/2	B120/2/2	B150/2/2	B180/2/2	B240/2/2	B300/2/2
	3 m	B25/2/3	B30/2/3	B50/2/3	B60/2/3	B75/2/3	B90/2/3	B120/2/3	B150/2/3	B180/2/3	B240/2/3	B300/2/3
	4 m	B25/2/4	B30/2/4	B50/2/4	B60/2/4	B75/2/4	B90/2/4	B120/2/4	B150/2/4	B180/2/4	B240/2/4	B300/2/4
	5 m	B25/2/5	B30/2/5	B50/2/5	B60/2/5	B75/2/5	B90/2/5	B120/2/5	B150/2/5	B180/2/5	B240/2/5	B300/2/5
	Additional m	B25/2/...	B30/2/...	B50/2/...	B60/2/...	B75/2/...	B90/2/...	B120/2/...	B150/2/...	B180/2/...	B240/2/...	B300/2/...



Above 10 tons, see flat webbing sling - 4 ply, page 14.

PROTECTIVE SLEEVE IN PVC


Colour	WHITE	PURPLE	OLIVE	GREEN	WHITE	YELLOW	GREY	RED	BROWN	BLUE	ORANGE
WLL (ton)	0,5	1	1,5	2	2,5	3	4	5	6	8	10
1 leg	-	PVC/035	PVC/070	PVC/080	PVC/100	PVC/110	PVC/170	PVC/170	PVC/230	PVC/300	PVC/300


COATING AND PROTECTIVE SLEEVE IN POLYURETHANE

Colour	WHITE	PURPLE	OLIVE	GREEN	WHITE	YELLOW	GREY	RED	BROWN	BLUE	ORANGE	
WLL (ton)	0,5	1	1,5	2	2,5	3	4	5	6	8	10	
REFERENCE	1 side coating	B25/2/1g/EP1	B30/2/1g/EP1	B50/2/1g/EP1	B60/2/1g/EP1	B75/2/1g/EP1	B90/2/1g/EP1	B120/2/1g/EP1	B150/2/1g/EP1	B180/2/1g/EP1	B240/2/1g/EP1	B300/2/1g/EP1
	2 sides coating	B25/2/1g/EP2	B30/2/1g/EP2	B50/2/1g/EP2	B60/2/1g/EP2	B75/2/1g/EP2	B90/2/1g/EP2	B120/2/1g/EP2	B150/2/1g/EP2	B180/2/1g/EP2	B240/2/1g/EP2	B300/2/1g/EP2
	1 side sleeve	-	B30/2/1g/FP1	B50/2/1g/FP1	B60/2/1g/FP1	B75/2/1g/FP1	B90/2/1g/FP1	B120/2/1g/FP1	B150/2/1g/FP1	B180/2/1g/FP1	B240/2/1g/FP1	B300/2/1g/FP1
	2 sides sleeve	-	B30/2/1g/FP2	B50/2/1g/FP2	B60/2/1g/FP2	B75/2/1g/FP2	B90/2/1g/FP2	B120/2/1g/FP2	B150/2/1g/FP2	B180/2/1g/FP2	B240/2/1g/FP2	B300/2/1g/FP2

24/48 hours delivery service not available for coatings.

⚠ DID YOU KNOW ? The minimum length for the eyes is fixed by standard EN 1492-1 : 3 times the width of the sling for widths up to 150mm ; 2.5 times the widths of the sling for width above 150 mm. These lengths have been fixed to respect an angle usage between 10° and 20° when using the slings. An excessive eye opening angle will open the sling; on the contrary, a small eye opening angle will generate a bending stress at the lifting axis.

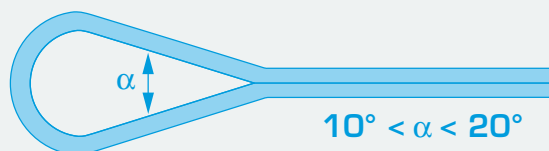

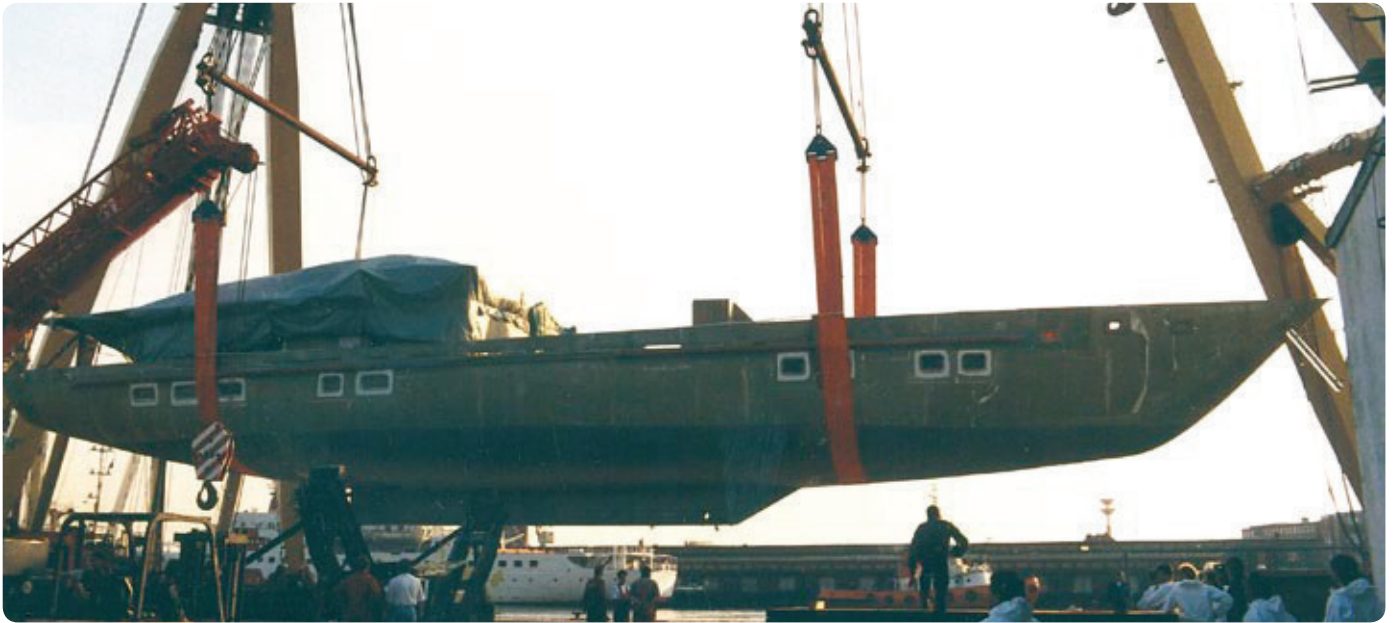

FLAT WEBBING SLING - HIGH CAPACITY UP TO 20 TONS (Category 2) C TYPE - 4 PLY - REINFORCED FOLDED EYE

Available from 2 to 20 tons, 3 to 30 meters
Safety factor 7 :1 – Complying with EN 1492-2 standard – 100% polyester



Reinforced folded eye		GREEN	GREY	BROWN	BLUE	ORANGE	ORANGE	ORANGE	ORANGE
WLL (ton)		2	4	6	8	10	12	16	20
Width (mm)		30	60	90	120	150	180	240	300
Thickness (mm)		12	13	14	14	15	14	15	15
Weight 3 m (kg)		1,10	2,20	3,30	4,80	5,50	7,50	10,00	13,50
Weight m/l (kg)		0,40	0,80	1,10	1,60	2,00	2,40	3,40	4,50
REFERENCE	3 m	C30/2/3	C60/2/3	C90/2/3	C120/2/3	C150/2/3	C180/2/3	C240/2/3	C300/2/3
	4 m	C30/2/4	C60/2/4	C90/2/4	C120/2/4	C150/2/4	C180/2/4	C240/2/4	C300/2/4
	5 m	C30/2/5	C60/2/5	C90/2/5	C120/2/5	C150/2/5	C180/2/5	C240/2/5	C300/2/5
	6 m	C30/2/6	C60/2/6	C90/2/6	C120/2/6	C150/2/6	C180/2/6	C240/2/6	C300/2/6
	7 m	C30/2/7	C60/2/7	C90/2/7	C120/2/7	C150/2/7	C180/2/7	C240/2/7	C300/2/7

PROTECTIVE SLEEVE IN PVC

Colour	GREEN	GREY	BROWN	BLUE	ORANGE	ORANGE	ORANGE	ORANGE
WLL (ton)	2	4	6	8	10	12	16	20
1 leg	PVC/055	PVC/070	PVC/110	PVC/170	PVC/170	PVC/230	PVC/320	PVC/320

COATING AND PROTECTIVE SLEEVE IN POLYURETHANE

Colour	GREEN	GREY	BROWN	BLUE	ORANGE	ORANGE	ORANGE	ORANGE
2 sides sleeve	C30/2/lg/FP2	C60/2/lg/FP2	C90/2/lg/FP2	C120/2/lg/FP2	C150/2/lg/FP2	C180/2/lg/FP2	C240/2/lg/FP2	C300/2/lg/FP2
2 sides coating	C30/2/lg/EP2	C60/2/lg/EP2	C90/2/lg/EP2	C120/2/lg/EP2	C150/2/lg/EP2	C180/2/lg/EP2	C240/2/lg/EP2	C300/2/lg/EP2

Coating and protective sleeve in polyurethane on 1 side only is available, please contact us. 24/48 hours delivery service not available for coatings.