

# RBG / VRBG

Load ring thread / VIP-Load ring thread.

4:1 180° M -20° 100°C 350°C max. BLUE-ID

(1) (2)



## PRODUCT FEATURES

- Large WLL range 3 t–16 t.
- Split force introduction thanks to multiple point fixing.
- Bracket can be pivoted through 180°.
- WLL possible up to 90° in load ring plane.
- Clear indication of the minimum WLL for all loading directions.



RBG 3 t (1)

VRBG 16 t (2)

<p>RBG 3 t 2 bolts.</p> <p>Also with vario-length.</p>	<p>VRBG 10 t / 16 t 4 bolts.</p>	<p>Patented wear marker.</p> <p>Ready to be discarded.      New.</p>
<p>VRBG split force introduction.</p> <p>WLL possible up to 90° in load ring plane.</p>	<p>VRBG</p> <p>Can be pivoted through 180°.</p>	

✓ Corresponds with the test criteria of BG/DGUV "GS-OA-15-04".

- Split force introduction through several points, going easy on the component.
- WLL up to 16 t.

# RBG / VRBG

Metric thread.

## RBG 3 – LOAD RING THREAD.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Tightening torque [Nm]	Ref. No.
RBG 3	3	1.07	67	34	16	5	48	22	92	6	18	30	1	178	2 x M16	71	120	51817
RBG 3-SL	3	<sup>1</sup>	67	34	16	5	48	22	92	6	18	25-205	1	178	2 x M16	71	120	8600318


<sup>1</sup> Weight depends on the design.

Subject to technical changes!

## VRBG 10 / 16 – VIP-LOAD RING THREAD.


Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	K [mm]	L [mm]	M	N [mm]	Tightening torque [Nm]	Ref. No.
VRBG 10	10	5.43	103	125	22	6	65	143	78	8	30	50	43	213	4 x M20	100	300	7994537
VRBG 16	16	11.3	131	170	30	8	90	198	104	10	46	70	63	270	4 x M30	134	600	7993255

Subject to technical changes!

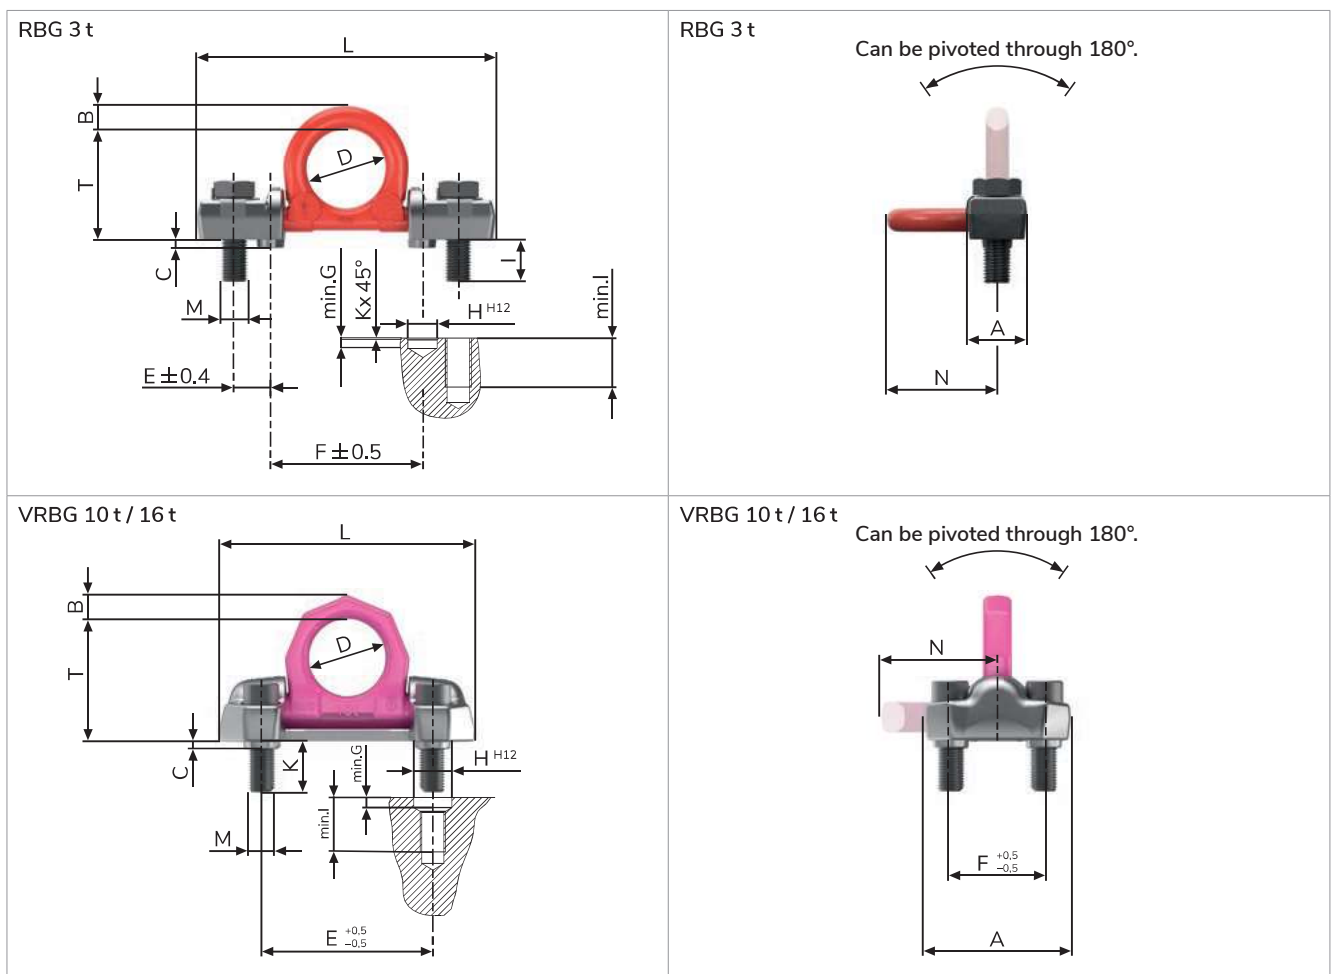

# VRBG / VRBG-FIX

Load ring thread / VIP-Load ring thread FIX.



## PRODUCT FEATURES

- Large WLL range 31.5 t–50 t.
- Split force introduction thanks to multiple point fixing.
- Suspension ring can be pivoted through 180°.
- WLL possible up to 90° in load ring plane.
- Clear indication of the minimum WLL for all loading directions.



VRBG 31.5t

VRBG-FIX 50 t

<p>VRBG-FIX 31.5 t 6 bolts.</p> 	<p>VRBG-FIX 50 t 8 bolts.</p> 	<p>Patented wear marker.</p>  <p>Ready to be discarded.      New.</p>
<p>VRBG split force introduction.</p>  <p>WLL possible up to 90° in load ring plane.</p>	<p>VRBG Can be pivoted through 180°.</p> 	

✓ Corresponds with the test criteria of BG/DGUV "GS-OA-15-04".

- Split force introduction through several points, going easy on the component.
- WLL up to 50 t.

# VRBG / VRBG-FIX

Metric thread.

VRBG 31.5 t / VRBG-FIX 50 t – VIP-LOAD RING ON PLATE.

Type	WLL [t]	Weight (kg/unit)	T [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	K [mm]	L [mm]	M	N [mm]	Tightening torque [Nm]	Ref. No.
VRBG 31.5 t	31.5	66.3	265	180	42	42	130	75	120	46	400	6 × M30	195	900	7910387
VRBG-FIX 31.5 t	31.5	66.3	288	180	42	42	130	75	120	46	400	6 × M30	195	900	7910591
VRBG-FIX 50 t	50	204	430	270	70	55	230	100	200	60	650	8 × M36	335	1.000	7909951

Subject to technical changes!

