

CLASS





B 4

MODEL LHC

LOCKING TYPE

Each LHC-horizontal lifting clamp is tested for 2 x WLL, provided with a serial number, and is delivered with a certificate and CE-marking. Safety factor 3:1.

Suitable up to a sheet surface hardness of 363 HV 10 (341 HB / 37 RC). Made of high strength steel. Each clamp is given a RFID transponder as standard, for simplified inspection and documentation. Area of application temperature: -20 °C to 100 °C (ambient and load temperature). The LHC-clamps are compact and easy to operate. The construction design of the LHC-clamps allows simple repair and maintenance.

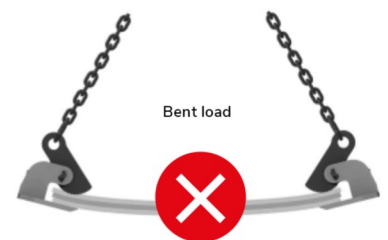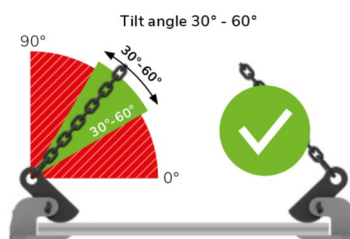

Type	Mat. no.	W.L.L.	Kg	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)
LHC 0,25 t	8505272	0,25 t	1,1	0-25,4	60,3	127	25,4	12,7	57,15	101,6	9,65
LHC 0,5 t	8505273	0,5 t	5	0-50,38	111,3	235	35	12,7	123,8	196,8	15,88
LHC 0,75 t	8505274	0,75 t	7,2	0-50,38	111,3	235	35,8	19	136,6	196,8	19
LHC 1,5 t	8505275	1,5 t	9,8	0-50,38	115,8	235	35,8	19	155,7	201,7	25,4
LHC 3 t	8505276	3 t	9,1	0-50,38	114,3	235	35,8	19	155,7	201,7	41,4
LHC 4 t	8505277	4 t	17,7	0-76,2	177,8	312,7	35,8	25,4	165,1	263,6	55,62