


Redance con rinforzo tipo K2B

K2B type reinforced thimbles

Finitura: zincatura a caldo
Finish: hot deep galvanized

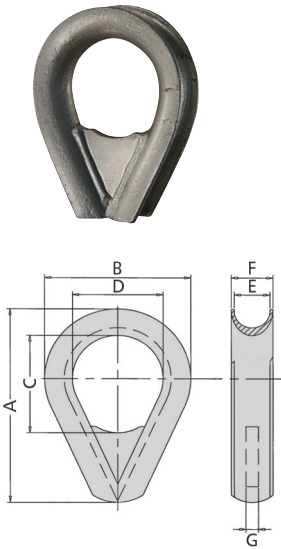

Codice Code	Fune Rope		Dimensioni Dimensions							Grillo max applicabile Max shackle allowed t	Peso Weight Kg
	Ø mm	Ø inches	A inches	B mm	C mm	D mm	E mm	F mm	G mm		
AREDK2B16	16	5/8	4	75	50	50	17	22	6	4,75	0,4
AREDK2B18	18	3/4	4 1/2	85	50	53	19	25	6	4,75	0,5
AREDK2B20	20	13/16	5	100	60	60	21	29	8	6,5	0,8
AREDK2B22	22	7/8	5 1/2	110	60	65	23	33	8	6,5	0,9
AREDK2B24	24	15/16	6	115	70	70	25	34	8	8,5	1
AREDK2B28	28	1 1/8	7	135	75	80	30	38	10	12	1,7
AREDK2B32	32	1 1/4	8	155	80	100	33	44	10	17	2,5
AREDK2B36	36	1 7/16	9	175	110	115	38	49	10	25	4
AREDK2B40	40	1 5/8	10	190	120	120	41	52	15	35	4,5
AREDK2B44	44	1 3/4	11	210	120	130	46	60	15	35	7
AREDK2B50	50	2	12	245	140	145	52	65	15	42,5	8,3
AREDK2B54	54	2 1/8	14	260	155	155	60	72	20	55	12,5
AREDK2B68	68	2 3/4	17	310	200	190	70	84	20	85	18
AREDK2B80	78	3 1/8	19	350	235	230	81	119	20	120	31
AREDK2B90	90	3 5/8	22	395	240	255	92	130	20	150	40
AREDK2B100	100	4	24	430	275	280	105	145	25	150	49
AREDK2B120	120	4 3/4	26	450	295	285	120	155	30	150	54

- Tolleranza ± 5%.
- Tolerance ± 5%.

