


TU-481



- Wide range of sizes available:
 - 27 and 54 metric tons (30 and 60 short Tons) capacity
 - 25mm to 60mm (1" to 2-1/4") wire rope diameter
 - 406mm to 610mm (16" to 24") sheave diameter
 - Larger capacity blocks available
- Meets or exceeds all requirements of ASME B30.26. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.
- Marked in short tons unless metric tag requested at time of order.

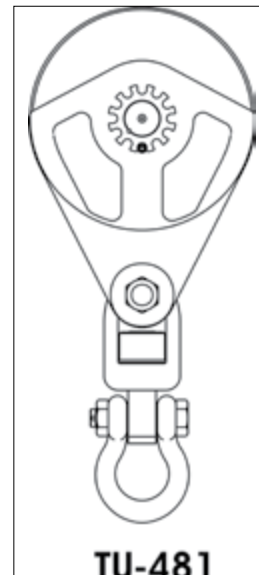

APPLICATION AND WARNING INFORMATION
SECTION 17

TU-481 High Capacity Snatch Blocks for Tilt-Up Wall Construction With Swivel Shackle

Working Load Limit (t)	Sheave Diameter (mm)	Wire Rope Diameter (mm)	With Swivel Shackle	
			TU-481 Stock No.	TU-481 Weight Each (kg)
27	406	26-32	2108327	107
27	406	32-38	2108351	107
27	508	26-32	2108387	113
54	508	32-38	2108411	177
54	457	26-32	2108453	177
54	457	32-38	2108483	177
54	610	26-32	2108528	204
54	610	32-38	2108558	204
54	610	38-44	2108588	204
54	610	44-51	2108618	204
54	610	51-57	2108633	204

4:1 Design Factor.

Contact our Block Hotline 800-772-1555 or visit kitocrosby.com/engineeredolutions for more information.