


Tenditori UNAV 6720 (ex UNI 2018) tipo FORCELLA-FORCELLA

JAW-JAW type UNAV 6720 (ex UNI 2018) turnbuckles

UNAV 6720 tipo II
canaula aperta
UNAV 6720 type II
open body

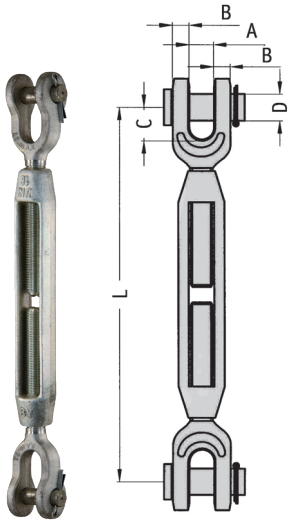

| Codice Code | Misura Size | Portata WLL Kg | Tenditore Turnbuckle | | Dimensioni Dimensions | | | | Peso Weight |
|------------------|----------------|--------------------------|-------------------------|----------------|--------------------------|---------|---------|---------|----------------|
| | | | Chiuso Closed | Aperto Open | A mm | B mm | C mm | D mm | Kg |
| | | | L mm | L mm | | | | | |
| ATENUNI2018IIA10 | M10 | 250 | 260 | 375 | 12 | 6 | 30 | 8 | 0.40 |
| ATENUNI2018IIA12 | M12 | 400 | 300 | 425 | 16 | 7 | 38 | 10 | 0.70 |
| ATENUNI2018IIA16 | M16 | 630 | 360 | 495 | 20 | 8 | 44 | 12 | 1.20 |
| ATENUNI2018IIA20 | M20 | 1000 | 410 | 540 | 24 | 10 | 50 | 16 | 2.00 |
| ATENUNI2018IIA22 | M22 | 1600 | 460 | 595 | 28 | 12 | 56 | 20 | 3.10 |
| ATENUNI2018IIA27 | M27 | 2000 | 505 | 640 | 32 | 14 | 62 | 22 | 4.60 |
| ATENUNI2018IIA30 | M30 | 2500 | 560 | 705 | 36 | 16 | 70 | 25 | 6.60 |
| ATENUNI2018IIA33 | M33 | 3150 | 565 | 745 | 40 | 18 | 78 | 28 | 8.80 |
| ATENUNI2018IIA36 | M36 | 4000 | 625 | 815 | 45 | 20 | 86 | 32 | 12.00 |
| ATENUNI2018IIA39 | M39 | 5000 | 650 | 855 | 50 | 22 | 94 | 36 | 15.00 |
| ATENUNI2018IIA45 | M45 | 6300 | 725 | 945 | 55 | 24 | 102 | 40 | 21.50 |
| ATENUNI2018IIA52 | M52 | 8000 | 790 | 1030 | 60 | 26 | 110 | 42 | 29.20 |
| ATENUNI2018IIA56 | M56 | 10000 | 845 | 1100 | 65 | 28 | 120 | 45 | 38.70 |
| ATENUNI2018IIA64 | M64 | 12500 | 945 | 1215 | 70 | 30 | 135 | 50 | 53.50 |
| ATENUNI2018IIA72 | M72 | 16000 | 1025 | 1315 | 80 | 33 | 150 | 56 | 72.20 |
| ATENUNI2018IIA76 | M76 | 20000 | 1115 | 1425 | 90 | 36 | 165 | 63 | 93.90 |
| ATENUNI2018IIA80 | M80 | 25000 | 1205 | 1535 | 100 | 40 | 180 | 70 | 112.00 |

- Su richiesta disponibili tipo I - canaula chiusa.
- Upon demand type I available - closed body.