




Loadblock Plus



- The highest standard resolution of any self-indicating compression loadcell on the market today (5,000+ divisions).
- Low capacity, self-indicating compression loadcell.
- Display Type: 6 digit 25mm LCD or 6 digit 1" LCD
- 100Hz peak hold.
- Compact size.
- Push button tare.
- Preset tare.
- Peak hold.
- RS485 port for connection to data-logging system allowing remote viewing.
- Audible set-point alarm and an overload counter.
- Selectable units te, lbs, kN, kg.
- Battery Type: 9v PP3.
- Battery Life: 80 hours continuous.
- Operating Temperature: -10°C to 50°C.
- Accuracy: ±0.1% of full scale.
- Protection: IP65 / NEMA4X.

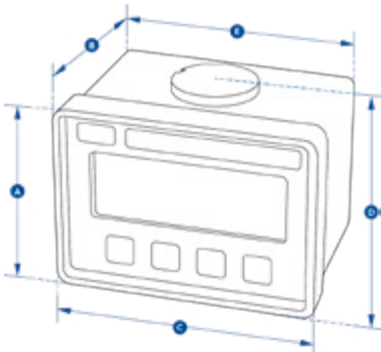

Straightpoint Loadblock Plus (LBP)

Stock No.	Model	Capacity (t)	Resolution (t)	Weight (kg)	Dimensions (mm)				
					A	B	C	D	E
2789035	LBP250KG	250 (kg)	0.1 (kg)	0.9	81	81	113	90	104
2789037	LBP500KG	500 (kg)	0.2 (kg)	0.9	81	81	113	90	104
2789034	LBP1T	1	0.0005	0.9	81	81	113	90	104
2789036	LBP2T	2	0.001	1.5	92	117	112	104	–
2789038	LBP5T	5	0.001	3.1	92	136	112	115	–